



Triolift 3.35 Fn 420

Operative range:

Repair and maintenance „Team workstation“

Application:

The proven autop team workstation for working in three levels:

- underbody of the vehicle
- wheels and brakes
- motor

to obtain:

- a satisfied customer due to fast service and repair
- high rentability by saving space and efficient treatment of orders

This proven product with many practical details and special accessories:

- working platform with tool deposit and possibility of installation of a head light setter
- control column with power supply and pressure control
- enlargement of the ramps, sliding
- illumination of the underbody of the car
- deposit for impact screw driver
- oil evacuation unit with tool deposit
- mirrors as drive-on help

is particularly proved as

- teamworkstation for the quick-service
- wheel alignment station for absolutely exact wheel alignment.

**Team workstation for quick service
incl. wheel-alignment**



autop Maschinenbau GmbH • Sandkampstraße 90 • D-48432 Rheine
Tel. ++49 59 71/86 02-02 • Fax ++49 59 71/86 02-25 • E-Mail: mail@autop.de • www.autop.de

...a company of the STENHØJ group



Triolift 3.35 Fn 420

Technical data:

Lifting capacity: 3500 kg

Platforms:

Stroke length: 650 mm

Lifting/ lowering time: app. 5 sec

Length: 4200 mm

Width: 570 mm

Between platforms: 905 +/- 70 mm

Drive-on angle: 5°

Wheel-free device:

Stroke length: 370 mm

Lifting/ lowering time: app. 8 sec

Length: 1400-2100 mm

Working platform:


Depth: 1060 mm

Pit:

Length: 4980 mm

Width: 990 mm

Depth: 900-950 mm

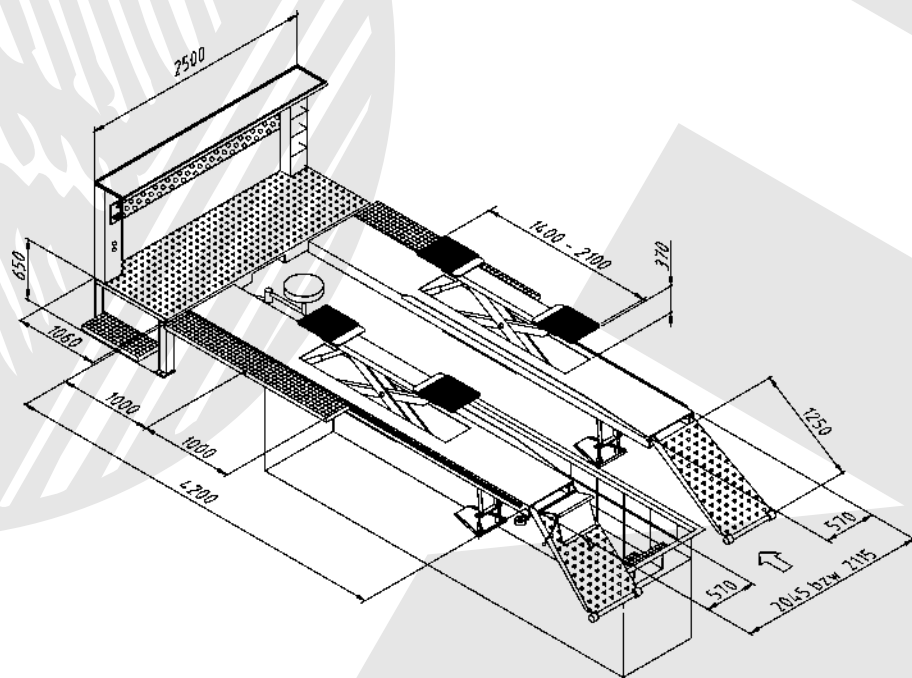

Components:

- Two hydraulic cylinders made of micro-alloyed high grade steel with hard-chrome plated pistons
- Security device by rigid bearing at the working platform
- Pump unit 3 kW/400V/16 A including oil filling
- Push button control for lifting/lowering of platforms and wheel-free device
- Working platform with control column and tool deposit
- Two on-floor platforms of sturdy welded design with special shaped profiles, sand-blasted, primed and painted; with corresponding drive-on flaps.
- Integrated hydraulic scissor lift with low drive-over height for simultaneous wheel-free lifting on all four wheels

Standard paint:

(alternatively)

RAL 5019 blue

RAL 7016 grey

Special paint:

On request

And also...

we are specialised in delivery and fitting of centre-ram and twin-ram inground lifts for:

- check-in
- repair and inspection
- body repair
- maintenance



autop Maschinenbau GmbH

Sandkampstraße 90 • D-48432 Rheine

Tel. ++49 59 71/86 02-02 • Fax ++49 59 71/86 02-25

E-Mail: mail@autop.de • www.autop.de

No liability accepted for specifications that are subject to alteration - validity 06/04
The data and pictures in this product information are not binding and are only giving an approximate description. Moreover we reserve the right of differences between the goods delivered and the data and pictures given here (i.e. technical data, equipment, material and optical appearance) so far as the differences are reasonable for the customer and a possible reduction in value or utility value of the goods delivered is not considerable.